


Project:	
Location:	
Model#: RHR1-MULTI-WP	Type:
Client:	Qty:
Prepared by:	Date:

SERIES SPECIFICATIONS




The RHR Series is a thermoplastic wet location remote head designed for indoor and outdoor applications. To be used as part of an Emergency lighting system providing illumination for the path of egress.



PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

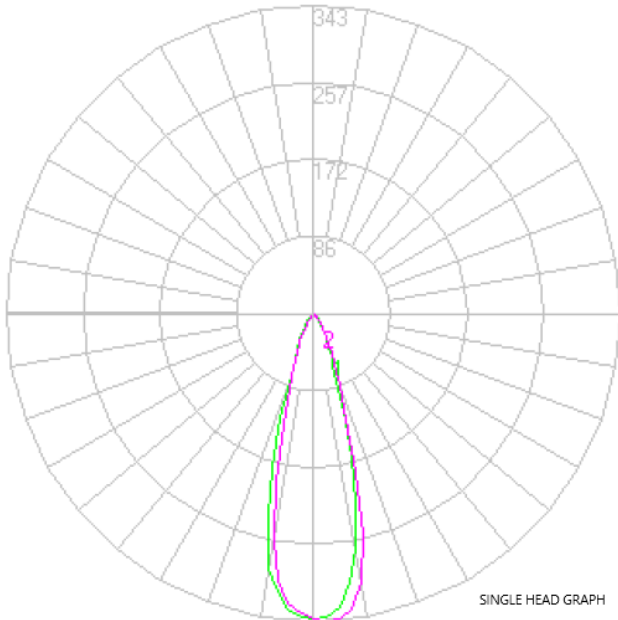

Initial Lumen Output: 100 lm

Luminaire Type: Remote head

Certification Standards: UL924, C22.2

No. 141-15

Efficacy: 100 lm/W

Environmental Rating(s): Wet location

Limited Product Warranty: 3 years for

fixture

Beam Angle: 27.40

Ambient Operating Temp: -25°C to 50°C /

-13°F to +122°F



Project:	
Location:	
Model#: RHR1-MULTI-WP	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

Source Type: LED
Colour Temperature: 5700K

CRI: > 80

L70: >54,000 Hrs

ELECTRICAL SPECIFICATIONS

Input Voltage: 3-12VDC
Max Operating Case Temperature: 50?

Fixture Draw: 1W
Over Temperature Protection: YES

Max On-Delay: 1S
Short Circuit Protection: YES

EMERGENCY INFORMATION

Input Voltage: 3-12VDC

Max Power Input: 1W

Emergency Certifications: Meets UL 924,
cULus, NFPA 101 Life Safety Code, NEC,
OSHA, Local and State Codes

PHYSICAL SPECIFICATIONS

Finish Colour: White
Lens Material: Polycarbonate

Mounting: Wall, ceiling
Reflector Material: ABS

Housing Material: Aluminium /
Polycarbonate
Weight: 0.24 kg

SHIPPING INFORMATION

OrderingCode(s): 0627-8562 RHR1-
MULTI-WP ROUND REMOTE HEAD - 1
HEAD
Carton Quantity: 12

Box Quantity: 1
Carton Dimensions (I-W-H): 380 x 350 x
260 mm / 0.1 x 0 x 380 inches

Box Dimensions (L-W-H): 127 x 127 x 178
mm / 5 x 5 x 7 inches
Carton Weight: 003.9 Kg

Project:	
Location:	
Model#: RHR1-MULTI-WP	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

