



Project:	
Location:	
Model#: UFO240-EM	Type:
Client:	Qty:
Prepared by:	Date:


SERIES SPECIFICATIONS

Spec Text Needed



PERFORMANCE SPECIFICATIONS

Luminance Distribution Chart

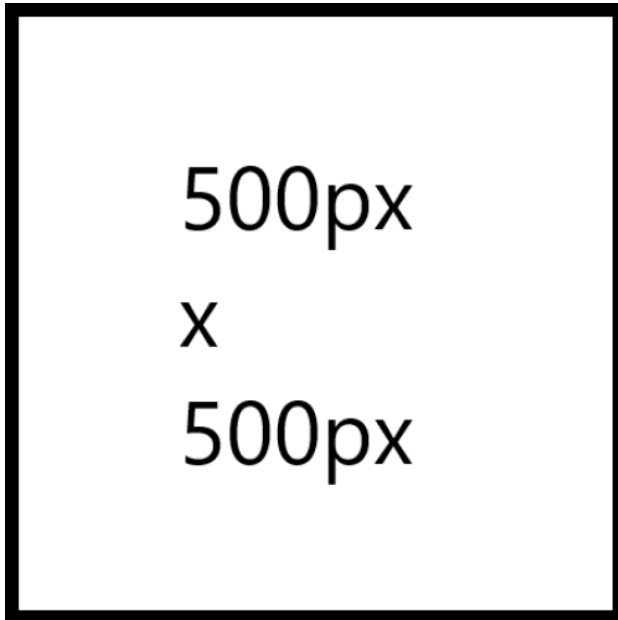

Initial Lumen Output: TBA
NEMA Type: Suspended
UL Classification: Wet Location Listed
Limited Product Warranty: 5 Year(s)

Efficacy: TBA
Luminaire Type: Suspended
Ambient Operating Temp: -40°C to +40°C

Max Candela: TBA
Environmental Rating(s): IP65
Certification Standards: cULus



Project:	
Location:	
Model#: UFO240-EM	Type:
Client:	Qty:
Prepared by:	Date:

LED SPECIFICATIONS

Source Type: LED

ELECTRICAL SPECIFICATIONS

Input Voltage: 120-347Vac	Input Frequency: 50/60hz	Current Draw at 120Vac: TBA
Current Draw at 347Vac: TBA	Inrush Current: TBA	Max On-Delay: TBA
Power Factor at 120Vac: TBA	Power Factor at 277Vac: TBA	Power Factor at 347Vac: TBA
THD at 120Vac(%): TBA	THD at 347Vac(%): TBA	Driver MTBF: TBA
Max Operating Case Temperature: TBA	Surge Suppression: TBA	Dimming: TBA
Dimming Current mA: TBA	Over Temperature Protection: TBA	Short Circuit Protection: TBA
Driver Certifications: TBA		

EMERGENCY INFORMATION

Drive Manufacturer: TBA	Drive Model: TBA	Input Voltage: TBA
Max Power Input: TBA	Standby Power: TBA	Output Power: TBA
Emergency Runtime: TBA	Battery Type: TBA	Battery Recharge Time: TBA
Emergency Certifications: TBA		

PHYSICAL SPECIFICATIONS

Finish Colour: TBA	Finish Type: Polyester Power Coat	Wiring: TBA
Mounting: TBA	Housing Material: DieCast Aluminium	Weight: .
Entries: 1		

SHIPPING INFORMATION

OrderingCode(s): 0631-9668 UFO240-EM	Box Quantity: 1	Box Dimensions (L-W-H): tba
Box Weight: tba		

Project:	
Location:	
Model#: UFO240-EM	Type:
Client:	Qty:
Prepared by:	Date:

LINE DRAWING

Line Drawings

