

Project:	
Location:	
Model#: TLTP24-3KHLO-10M	Туре:
Client:	Qty:
Prepared by:	Date:

### **SERIES SPECIFICATIONS**



To supply Tamlite TLTP series of single colour 3000K LED Tape light. Tape shall use an integrated SMD LED cluster. Tape shall be 3oz Copper-PET Laminate rated at 5A. Tape shall be cuttable in intervals of 4 inches (101.6mm). Driver(24VDC) and controls shall be external. Tape light shall be cETLus approved.







### PERFORMANCE SPECIFICATIONS


Initial Lumen Output: 800lm/M
Ambient Operating Temp: -20C to +40C

Environmental Rating(s): IP20
Certification Standards: cETLus

**UL Classification:** Dry Location Only **Limited Product Warranty:** 5 Year(s)

### LED SPECIFICATIONS

SPD



Source Type: LED CRI: >90 Colour Temperature: 3000K



Project:	
Location:	
Model#: TLTP24-3KHLO-10M	Туре:
Client:	Qty:
Prepared by:	Date:

### **ELECTRICAL SPECIFICATIONS**

**Driver Part Number:** Sized and bought

separately


Dimming: With RF Controls

Input Voltage: 24Vdc

Fixture Draw: 14.4W/m

## LINE DRAWING

## **Line Drawings**

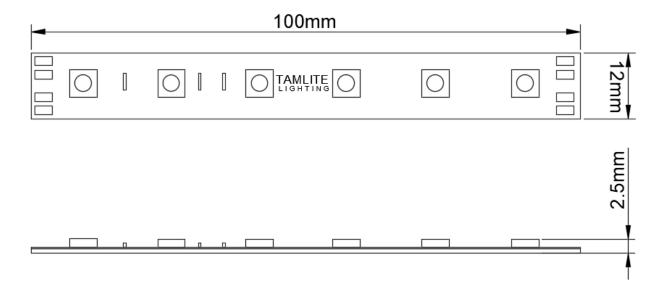

# SERIES ARCHITECTURE

**Optional Extras:** Power Supplies Mounting Channels TLCN\_XXX\_24\_X TLTP-5W50T TLTP-5W15C TLTP-5WBC TLTP-5WXC TLTP-5WTC TLTP-5WLC TLTP24-XX-CON