




Project:	
Location:	
Model#: MWP155K-120-BZ-PC	Type:
Client:	Qty:
Prepared by:	Date:

## SERIES SPECIFICATIONS




Tamlite Lighting Canada  
TAMWLITE-LED-PC  
NEW LED WITH WALL PLATE WITH PHOTO CELL  
Horizontal Footcandle  
Scale: 1 foot = 10 ft  
Light Level: 100  
Lumens Per Lamp: 14.4  
Lumens Per Lamp: 14.4  
Lumens Per Lamp: 14.4  
Maximum Calculated Value = 2.03 ft  
Maximum Calculated Value = 2.03 ft

To supply Tamlite MWP15 series of LED fixtures as specified. The body shall be polycarbonate and mount to an aluminum back plate. The LEDs shall be 5000K in CCT. The luminaire shall be cETLus and DLC listed.



## PERFORMANCE SPECIFICATIONS

## Isolux Diagram

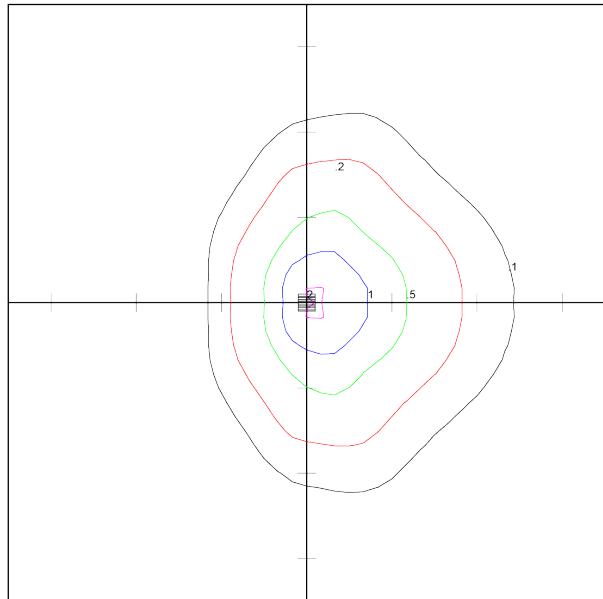

Tamlite Lighting Canada  
TLMWP14LED/PC  
14W LED MINI WALL PACK WITH PHOTO CELL

Horizontal Footcandles  
Scale: 1 Inch = 10 Ft.  
Light Loss Factor = 1.00  
Lumens Per Lamp = N.A. (absolute photometry)  
Luminaire Lumens = 986  
Mounting Height = 10.00 Ft  
Maximum Calculated Value = 2.03 Fc  
Arrangement: Single

**Initial Lumen Output:** 986lm

**UL Classification:** Wet Location Listed

**DLC Number:** PLHH3S66Z411

**Efficacy:** 76lm/W

**Ambient Operating Temp:** -20C to +40C

**CCN Number:** IFAM7.E359675


**Max Candela:** 232cd at H15 V20

**Certification Standards:** UL Safety US-CA  
, DLC

**Limited Product Warranty:** 5 Year(s)

## LED SPECIFICATIONS

### SPD

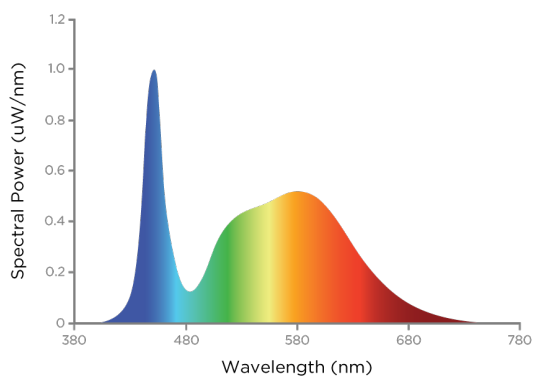

**Source Type:** LED  
**Colour Temperature:** 5000K

**CRI:** >80  
**Chromaticity:**  $x=0.3462$   $y=0.3583$

**L90:** 50,000 Hrs

## ELECTRICAL SPECIFICATIONS

**Input Voltage:** 120Vac  
**Current Draw@ 120Vac:** 0.1250A

**Input Frequency:** 50-60Hz  
**Power Factor @120Vac:** >.90

**Fixture Draw:** 13.04W

## PHYSICAL SPECIFICATIONS

**Housing Material:** Aluminium Back Plate

**Lens Material:** Prismatic Polycarbonate

## SHIPPING INFORMATION

**OrderingCode(s):** MWP155K-120-BZ-PC  
**Box Weight:** 1.48 kg  
**Carton Weight:** 6.1 kg

**Box Quantity:** 1  
**Carton Quantity:** 4

**Box Dimensions (L-W-H):** 310 x 210 x 125 mm  
**Carton Dimensions (L-W-H):** 640 x 440 x 395 mm

## LINE DRAWING

### Line Drawings

