

| | |
|----------------------|-------|
| Project: | |
| Location: | |
| Model#: EVKTP-3K-KIT | Type: |
| Client: | Qty: |
| Prepared by: | Date: |

SERIES SPECIFICATIONS



To supply TamLite EVKTP series of single colour LED Tape light. Tape shall use an integrated SMD LED cluster. Tape shall be cuttable in intervals of 4 inches (101.6mm) and be sold in lengths of 5M. Plug-in driver shall be external. Kit shall come with driver, wiring and connectors. Tape Light Kit shall be cETLus approved.



PERFORMANCE SPECIFICATIONS


Initial Lumen Output: 800 lm/M
Environmental Rating(s): IP20
Certification Standards: cETLus

Efficacy: 66.66
UL Classification: Dry Location Only
Limited Product Warranty: 5 Year(s)

Luminaire Type: Direct to Elevator Cab
Ambient Operating Temp: 0C to +40C

LED SPECIFICATIONS

SPD

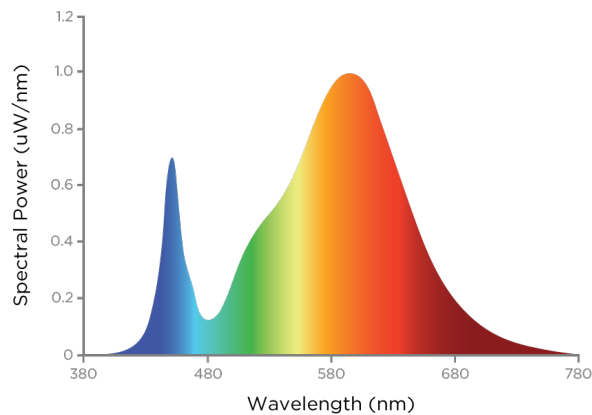

Source Type: LED
CRI: >70

Manufacturer:
Colour Temperature: 3000K

Part Number: SMD 5050
Colour Tolerance: +/- 500K



| | |
|----------------------|-------|
| Project: | |
| Location: | |
| Model#: EVKTP-3K-KIT | Type: |
| Client: | Qty: |
| Prepared by: | Date: |

ELECTRICAL SPECIFICATIONS

Input Voltage: 120Vac(Power Supply)
Current Draw at 120Vac: 0.5000A
Dimming: Not Suitable for Dimming

Input Frequency: 50/60 Hz
Max On-Delay: <1s

Fixture Draw: 60.00 W
Max Operating Case Temperature: <80°C
in free air

PHYSICAL SPECIFICATIONS

Finish Type: 3oz copper PET Laminate
Housing Material: Aluminium Channels
(options)

Wiring: Pre-Terminated with 12' 22AWG
Cable

Mounting: Surface, cutable every 4"

SHIPPING INFORMATION

OrderingCode(s): 0590-4729 EVKTP-3K-KIT

Box Quantity: 1

SERIES ARCHITECTURE

Series Architecture

| Series | Colour Temperature | Size |
|--------|--------------------|------|
| EVKTP | 3000K | KIT |
| | 3500K | |

Kit Includes:

- 5m Reel 3000K/4000K/5000K; 24VDC @ 12W/m; Pre-Terminated with 12' 22AWG Double Insulated Cable
- 72W 24VDC PSU w/ Female Barrel Plug & 2 Strips of 3M Double-Sided Adhesive
- 3pcs 10cm "Hippo" style interconnect w/ Double Insulated 22AWG Cable

Optional Extras:

- EVKTP-PSU72-24V - 72W 24VDC PSU w/ female Barrel Plug and 2 Strips of 3M Double-Sided Adhesive - (White Carton)
- EVKTP-PSU-ADPTR - Male Barrel Plug to "Hippo" tape connector, 60cm cable Double Insulated 22 AWG - (Poly Bag)
- EVKTP-2WIOC-6PK - 10cm "Hippo" style interconnect w/ Double Insulated 22AWG Cable - (6-pack Poly Bag)

Optional Extras: LVLS Tape Light Channels